

FORTIFIED FOUNDATIONS
5.0 MM

*Milliken*TM







Eero in Drawing EER108-215-209




HERITAGE WOOD IN HONOR HER218 (9" x 60")

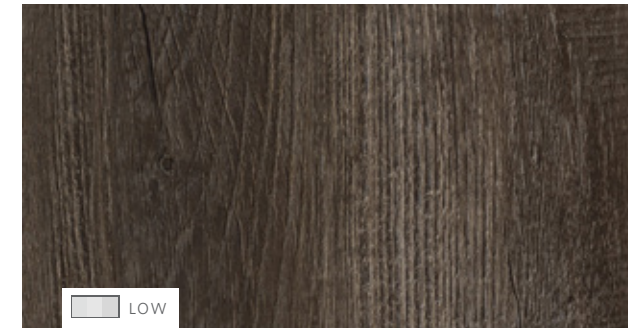


HERITAGE WOOD IN LEGACY HER145 (9" x 60")

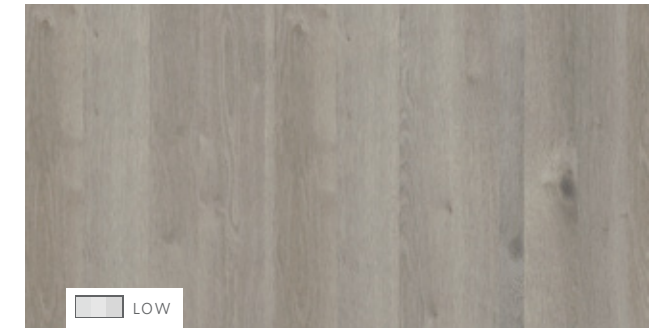


PIKE IN CLOUD PIK144 (9" x 60")

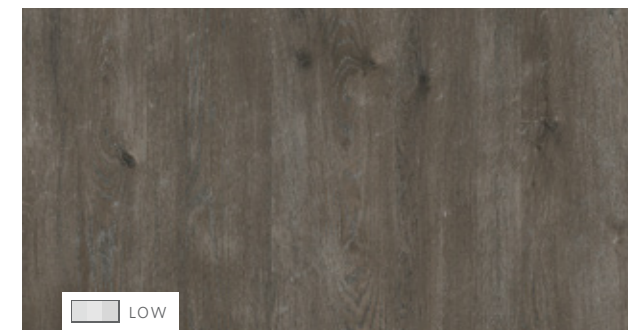

SHENANDOAH IN MOOSE SHE145 (9" x 60")

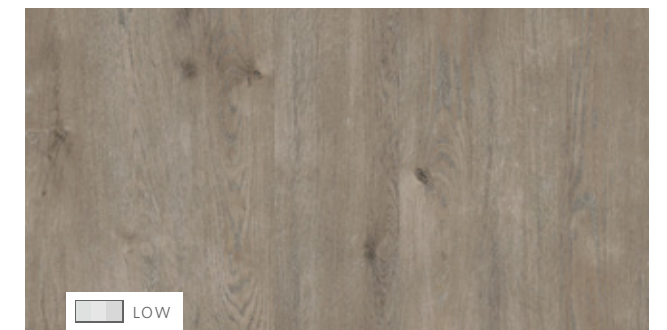


SHENANDOAH IN MIST SHE208 (9" x 60")

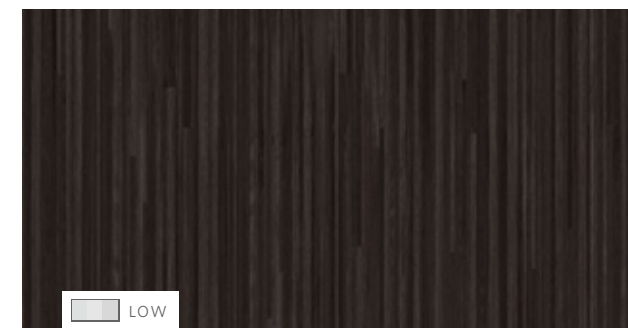


FARGESIA BAMBOO IN WICKER FAR79 (9" x 60")



SHENANDOAH IN FOG SHE76-144 (9" x 60")

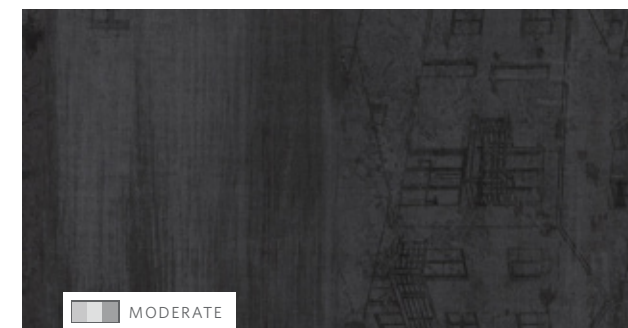

EERO IN INTERIOR EER79-13 (9" x 60")

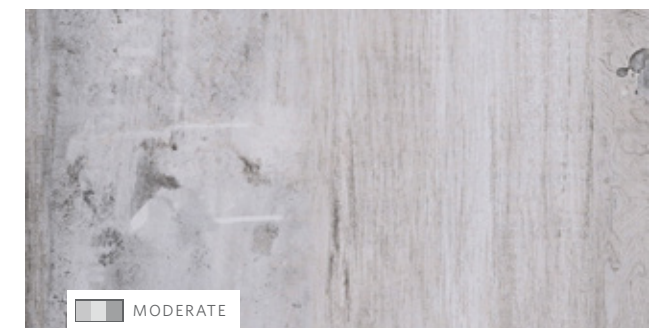

EERO IN DRAWING EER108-215-209 (9" x 60")




Gunnison in Brook GUN208-176



FARGESIA BAMBOO IN FIBER FAR217 (9" x 60")




FARGESIA BAMBOO IN CANE FAR18 (9" x 60")

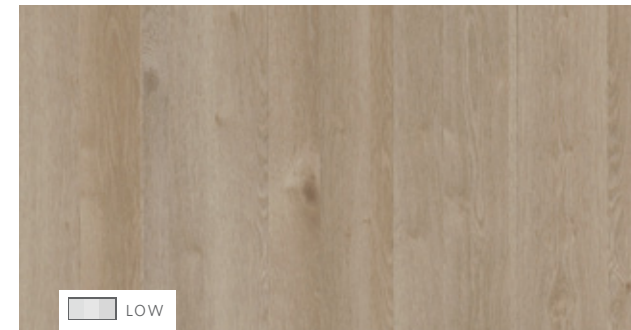

PIKE IN DEW PIK121-204 (9" x 60")




PIKE IN BARK PIK176-121 (9" x 60")

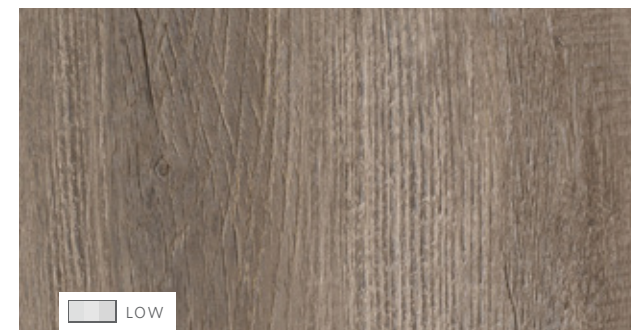

HERITAGE WOOD IN PRIDE HER208 (9" x 60")




FARGESIA BAMBOO IN RATTAN FAR76 (9" x 60")

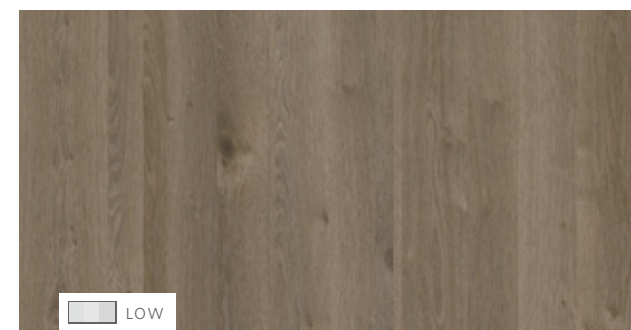


PIKE IN ANTLER PIK124-208 (9" x 60")



HERITAGE WOOD IN COURAGE HER76 (9" x 60")

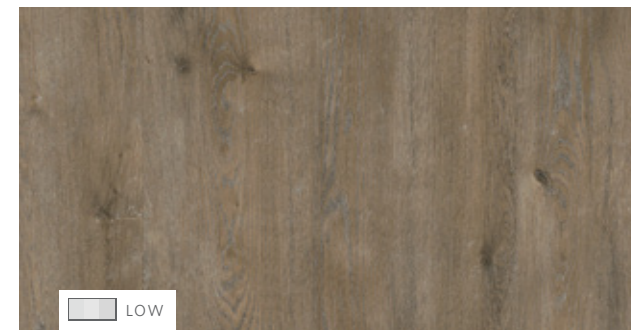

SHENANDOAH IN WHIMSY SHE176 (9" x 60")

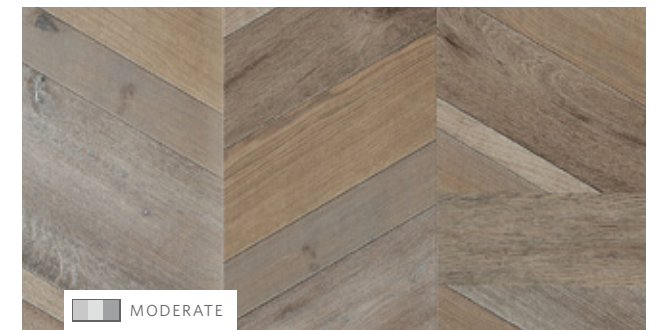

GUNNISON IN BROOK GUN208-176 (9" x 60")

LOW

LOW

LOW

LOW

LOW

LOW

LOW

LOW

LOW


MODERATE




Power Grid in Cable PWG171




POLISHED CONCRETE IN SCORING POL144 (36" x 36")

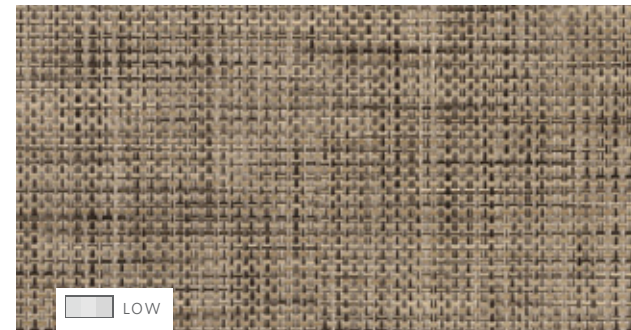

POWER GRID IN CONDUIT PWG15 (36" x 36")

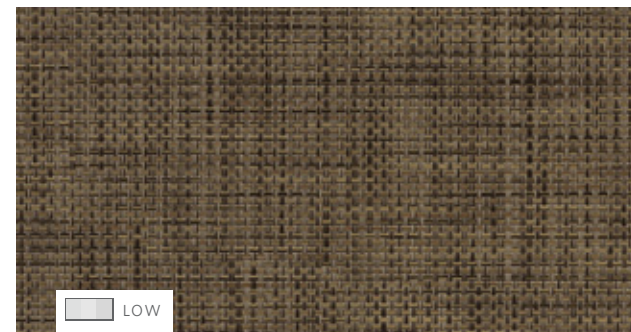


POWER GRID IN WIRE PWG22 (36" x 36")

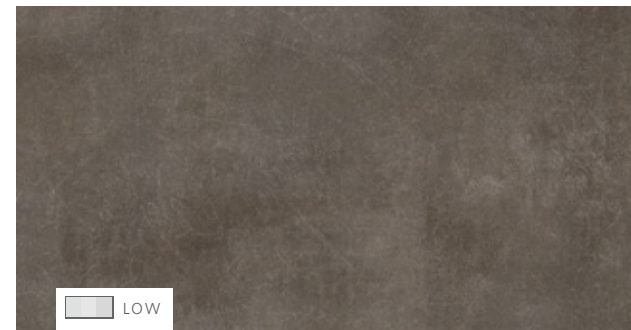


POLISHED CONCRETE IN TROWEL POL55 (36" x 36")



POLISHED CONCRETE IN SANDPAPER POL13 (36" x 36")

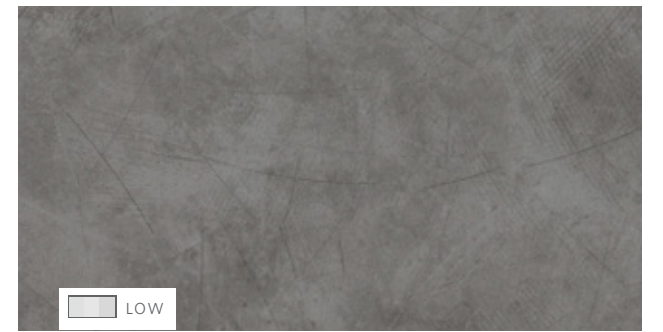


TANGIBLE IN DAWN TAN6 (18" x 36")

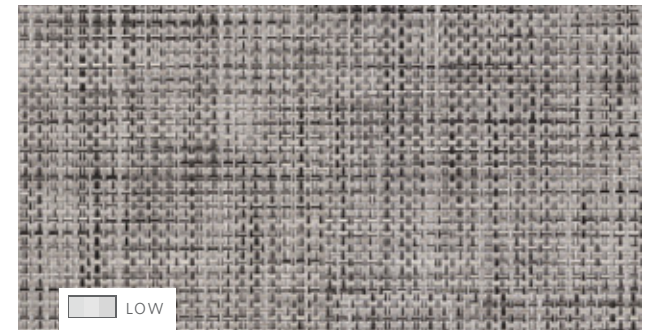


POWER GRID IN CABLE PWG171 (36" x 36")



POWER GRID IN STATION PWG97 (36" x 36")

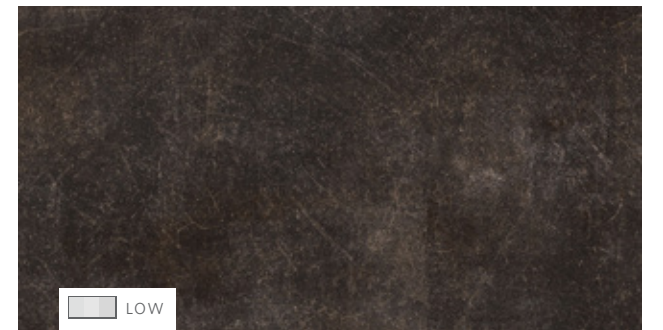

POLISHED CONCRETE IN POLISH POL67 (36" x 36")

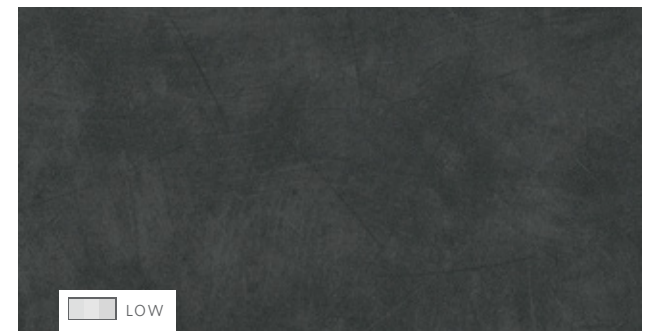

TANGIBLE IN DUSK TAN79 (18" x 36")



QUICK REFERENCE GUIDE

EERO



TILE SIZE
9" x 60"

COLORS





-  DRAWING EER108-215-209
-  INTERIOR EER79-13

HERITAGE WOOD




TILE SIZE
9" x 60"

COLORS



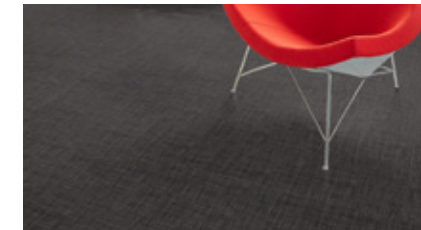

-  LEGACY HER145
-  PRIDE HER208
-  HONOR HER218
-  COURAGE HER76

POWER GRID




TILE SIZE
36" x 36"

COLORS

-  CONDUIT PWG15
-  CABLE PWG171
-  WIRE PWG22
-  STATION PWG97

FARGESIA BAMBOO

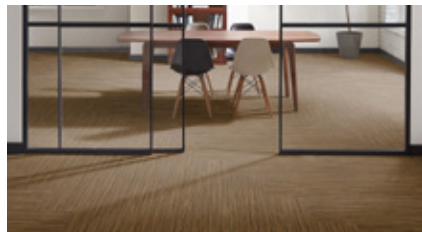

TILE SIZE
9" x 60"

COLORS





-  CANE FAR18
-  FIBER FAR217
-  RATTAN FAR76
-  WICKER FAR79

PIKE




TILE SIZE
9" x 60"

COLORS



-  DEW PIK 121-204
-  ANTLER PIK124-208
-  CLOUD PIK144
-  BARK PIK176-121

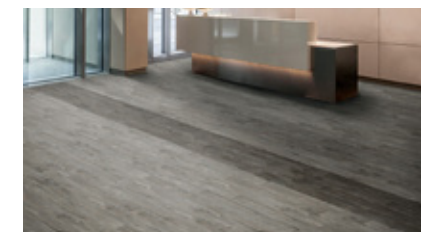SHENANDOAH




TILE SIZE
9" x 60"

COLORS

-  MOOSE SHE145
-  WHIMSY SHE176
-  MIST SHE208
-  FOG SHE76-144

GUNNISON

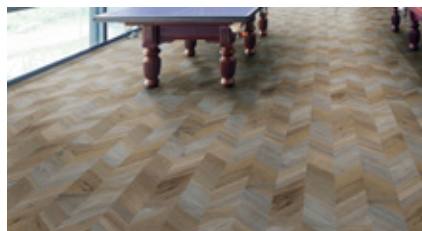


TILE SIZE
9" x 60"

COLORS




-  BROOK GUN208-176

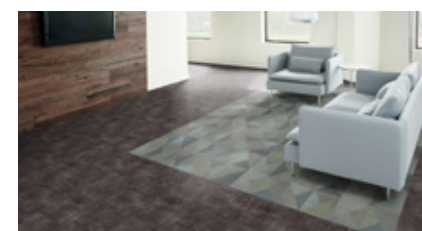POLISHED CONCRETE




TILE SIZE
36" x 36"

COLORS

-  SANDPAPER POL13
-  SCORING POL144
-  TROWEL POL55
-  POLISH POL67

TANGIBLE

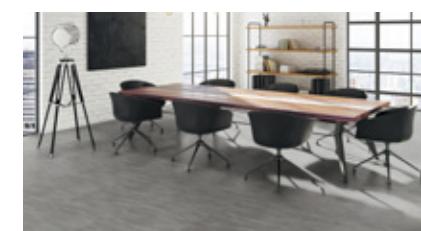

TILE SIZE
18" x 36"


COLORS

-  DAWN TAN6
-  DUSK TAN79

SHIPPING INFORMATION

Pattern	Size	Pieces/Box	SF/Box	Boxes/Pallet
Heritage Wood, Pike, Shenandoah, Fargesia Bamboo, Eero & Gunnison	9" x 60"	6 Pieces	22.4 SF	60 Boxes (1,344 SF)
Tangible	18" x 36"	4 Pieces	18 SF	54 Boxes (972 SF)
Polished Concrete & Power Grid	36" x 36"	4 Pieces	36 SF	26 Boxes (936 SF)

FLEXFORM™ 5.0MM LVT

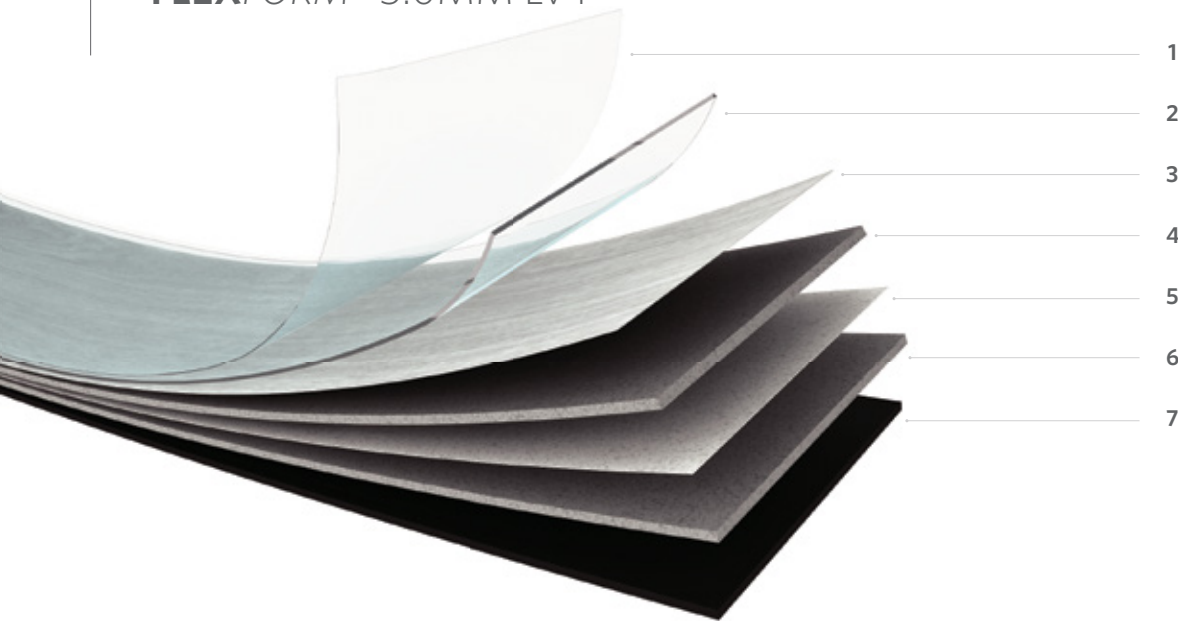

OVERALL THICKNESS
5mm (.197")

- 1. PROGUARD POLYURETHANE COATING**
Integrated surface technology provides best in class scratch & stain resistance, eliminates the need for additional finishes or harsh chemical treatments.
- 2. WEAR LAYER**
Heavy commercial grade transparent wear layer protects the print visuals and ensures product performs in heavy foot traffic.
- 3. PRINTED LAYER**
State of the art printing technology providing authentic visuals and designs.
- 4. INTEGRAL SOUND ABSORPTION LAYER**
Provides improved acoustical performance and supports comfort underfoot.
- 5. GLASS FIBER LAYER**
Supports dimensional stability.
- 6. HIGH PERFORMANCE CORE LAYER**
Ensures excellent durability, stability and long term performance.
- 7. BACKING LAYER**
Engineered balance layer provides stability and durability of the product.

FORTIFIED FOUNDATIONS

5.0MM Product Specs

The information shown here is only a partial listing of the full product information. Visit our website for the complete and most up-to-date specifications of each product.

FLEXFORM

Tile Size

9" X 60"

18" X 36"

36" X 36"

Construction

High Performance Luxury Vinyl Tile

Finish

ProGuard MAX™ Polyurethane Coating

Wear Layer Thickness

22mil (0.55mm)

Overall Thickness

5.0mm (0.197")

Edge Profile

Micro Bevel

Plasticizer

100% Phthalate Free, Biobased Plasticizer

Critical Radiant Flux (ASTM E648)

Pass - Class 1

Smoke Density (ASTM E662)

Pass

Short-Term/Residual Indentation (ASTMF1914-07)

Pass

Flexibility (ASTM F137)

Pass

Heat Stability by Color Change (ASTM F1514)

Pass

Light Stability (ASTM F1515)

Pass

Static Coefficient of Friction (ASTM D2047)

Pass

Dimensional Stability (ASTM F2199)

Pass

Resistance to Chemicals (ASTM F925)

Pass


Static Load Limit (ASTM F970)

Pass

Warranty

20 Year Limited Commercial Wear Warranty

Recommended Installation Methods

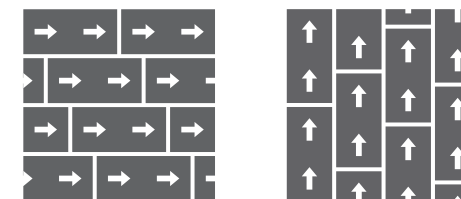

Ashlar

Random

SHADE VARIATION GUIDE



LOW

MODERATE

HIGH

Just as texture and physical appearance will vary in samples of wood, beautiful variations of shade are found in this unique LVT product. The shade variation guide reflects our LVT styles ranging from low, to moderate, to high. Low shade variation features soft and subtle gradations. Moderate shade variation contains a more distinguishable variety of hue. And high shade variation models the highest level of contrast. The patterns in **FORTIFIED FOUNDATIONS** have **varying** shade variation as noted throughout the brochure.



FORTIFIED FOUNDATIONS

5.0 MM

FLEXFORM™ LVT

SUSTAINABLE FEATURES

Milliken LVT is durable resilient flooring engineered with the highest quality raw materials to provide unsurpassed performance and enduring aesthetics. Milliken LVT is 100% phthalate free. All production waste is granulated and recycled into backing production to create an internal closed loop recycling process. Milliken LVT is manufactured at facilities that are ISO 9001 compliant.

Milliken LVT meets many environmental standards, including FloorScore® certified, Prop 65 Free and Phthalate Free, Certified EPD, and Declare.



Declare.

Images in this brochure are approximate for color and pattern scale. Please use actual samples to make your final selections.

SHOWN ON THE COVER

(Front) Pike in Cloud PIK144. Vertical Ashlar.
(Back) Tangible in Dusk TAN79. Vertical Ashlar.

Milliken™

Customer Concierge 800.824.2246 | millikenfloors.com
© 2021 Milliken & Company | Design © Milliken & Company